

B.E.G.**SAFETYLUX®**

- Voltage: 230 V AC 50 / 60 Hz
- Dimensions: 359 x 163 x 90 mm
- Lamp: 8 W Fluorescent lamp T16

2DN-H25/8/1-LLD

Prod.No. 7190 EAN: 4007529071906

Order data

Designation	Colour	Art.No
2DN-H25/8/1-LLD	white	7190

Accessories

Designation	Colour	Art.No
Wire basket BSK 2DN KR26 KR36	white	7887

Technical data

Voltage:	230 V AC 50 / 60 Hz
Dimensions:	359 x 163 x 90 mm
Lamp:	8 W Fluorescent lamp T16
Visibility range:	25
Operation mode:	Permanent operation, Wake up mode
Luminous flux / intensity:	8 W Fluorescent lamp T16 (inclusive) Luminous flux of light 270 lm
Degree / class of protection:	IP54 / Class II
Ambient temperature:	+5 °C to +35 °C
Housing:	Polycarbonate
Material color:	white

Battery

Accu:	NiMH 3.6 V 1600 mAh
Nominal operation duration:	1 h

Monitoring

Local surveillance:	Button for operation check
---------------------	-------------------------------

Product information

Illuminated exit sign / pictorial emergency sign with single battery

Sturdy plastic case IP54


Visibility range 25 m

Eco-friendly NiMH battery

Rated operating time 1 or 3 hours

Button for operation check (on the housing)

Lamp, battery and four pictograms included

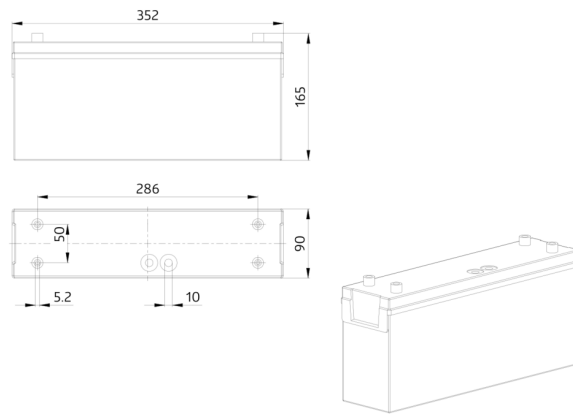

Accessories



Wire basket BSK 2DN KR26 KR36

Art.No: 7887

Dimensions: 442 x 241 x 143 mm

Housing: coated steel basket

Material color: white