

B.E.G.**LUXOMAT®**

LC-Click-N 140

Prod.No. 91001 EAN: 4007529910014

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: 103 x 78 x 84 mm
- Power consumption: approx. 0.4 W

Areas of application

- outdoor areas (entrances/access roads)
- parking areas
- underground car parks

Order data

| Designation | Colour | Art.No |
|----------------|--------|--------|
| LC-Click-N 140 | white | 91001 |

Accessories

| Designation | Colour | Art.No |
|----------------------------------|-----------------|--------|
| RC-Arc extinction kit | white | 10880 |
| Mini-RC-Arc extinction kit | | 10882 |
| Wire basket BSK (Ø 164 x 143 mm) | white | 92467 |
| Pole holder | stainless steel | 93220 |
| Wall holder | white | 93222 |
| Wall holder | anthracite | 93221 |
| Blinds LC-Click-N | | 32699 |

Technical data

| | |
|---|--|
| Voltage: | 110 - 240 V AC 50 / 60 Hz |
| Dimensions: | 103 x 78 x 84 mm |
| Power consumption: | approx. 0.4 W |
| Detection area: | horizontal 140° (Wall mounting) max. 12 m across max. 4 m towards |
| Range: | max. 2 m anti- creep protection |
| Monitored area (tangential movement): | 170 m ² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2 m / 3 m / 2.5 m |
| Degree / class of protection: | IP54 / Class II |
| Impact strength: | IK04 |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white mat, similar to RAL9010 |

Channel 1 (lighting control)

| | |
|----------------------|--|
| | 1000 W, $\cos \varphi$ = 1 |
| Switching power: | 500 VA, $\cos \varphi =$ 0.5 400 W LED |
| Type of contact (k): | 1x μ -contact, NO contact |
| Follow-up time: | 4 sec - 20 min |
| Switch-on threshold: | 2 - 500 Lux |

Product information

Motion detector with 140° detection area and 180° anti-creep zone

Adjustable ball head

Detection area can be restricted with blinds

Zero crossing switching


Simple mounting thanks to plug base

Cable entry possible from above, from below and from behind

Can be mounted on standard flush-mount boxes

Application examples:

outdoor areas (entrances/access roads), parking areas,
underground car parks

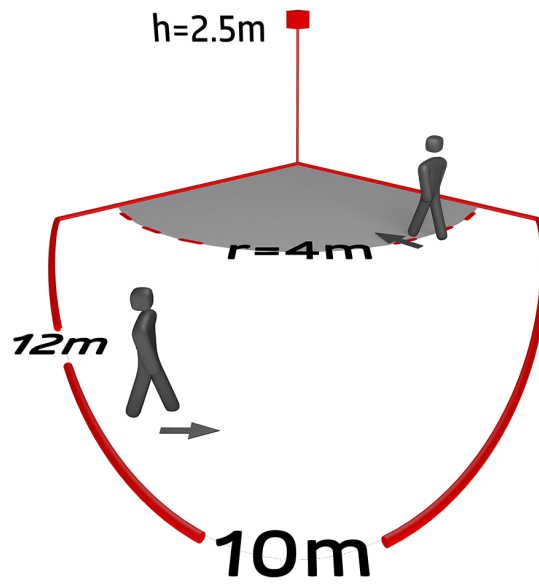

Accessories



RC-Arc extinction kit
Art.No: 10880

Voltage: 230 V AC ±10%
Dimensions: 38 x 12 x 26 mm
Degree / class of protection: IP20 / Class II



Mini-RC-Arc extinction kit
Art.No: 10882

Voltage: 230 V AC ±10%
Dimensions: 50 x 23 x 8 mm
Degree / class of protection: IP20 / Class II



Wire basket BSK (Ø 164 x 143 mm)
Art.No: 92467

Dimensions: Ø 164 x 143 mm
Impact strength: IK09
Housing: coated steel basket



Pole holder
Art.No: 93220

Dimensions: 188 x 98 x 134 mm
Housing: stainless steel
Material color: stainless steel



Wall holder
Art.No: 93222

Dimensions: 188 x 98 x 134 mm
Material color: white



Wall holder
Art.No: 93221

Dimensions: 188 x 98 x 134 mm
Material color: anthracite



Blinds LC-Click-N
Art.No: 32699

Housing: polycarbonate, UV-resistant
Material color: transparent