

**B.E.G.****LUXOMAT® net**

## PD11-BMS-FLAT-FC DALI-2 Set 93542-92537

- Voltage: via DALI Bus, max. 22.5 V DC
- Dimensions: **Ø 52 x 48 mm + Ø 52 x 3 mm (92537)**
- Settings: via DALI-Bus and application which supports DALI multisensors according to IEC62386, parts 101, 103, 303 and 304

### Order data

Designation	Colour	Art.No
PD11-BMS-FLAT-FC DALI-2	white	93542
Cover ring PD11 (52 mm)	black	92537

## Technical data

Voltage:	via DALI Bus, max. 22.5 V DC
Dimensions:	<b>Ø 52 x 48 mm + Ø 52 x 3 mm (92537)</b> via DALI-Bus and application which supports DALI
Settings:	multisensors according to IEC62386, parts 101, 103, 303 and 304
Typ. power input:	7 mA
Settling time:	200 ms
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 9 m across max. Ø 6 m towards max. Ø 3 m seated
Monitored area (tangential movement):	63 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK02
Measured light output:	0 - 4095 Lux, Mixed light measuring
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	<b>black glossy, similar to RAL9011 (92537)</b>

## Product information

Set : PD11-BMS-FLAT-FC DALI-2 + Cover ring PD11  
(52 mm) black glossy, similar to RAL9011

Low profile DALI-2 multisensor (input device) having a visible  
height of only 0.85 mm

DALI-2 certified product

Powered via DALI bus

DALI multimaster technology according to IEC 62386 part 103

Instance 0 provides information regarding occupancy and  
movement for the DALI-Bus according to IEC 62386 part 303

Instance 1 provides LUX values for the DALI-Bus according to  
IEC 62386 part 304

Parameterisation is possible via mandatory Multimaster-  
Application-Controller of any manufacturer. This controller  
must support IEC 62386 parts 101/103/303/304.


Spring clips for quick and easy installation in suspended  
ceilings

Includes blinds and clamp ring for installation into light fittings

With accessories for flush-mounting in ceiling and exposed  
concrete

Individual adaption of the PIR sensor sensitivity

Status LEDs can be activated / deactivated

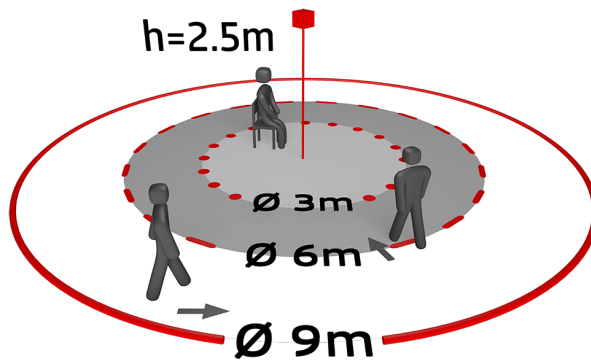

## Set items

To receive the bundle according to the technical specification, please order the items listed.




### **PD11-BMS-FLAT-FC DALI-2**

Art.No: 93542

Voltage: via DALI Bus, max. 22.5 V DC

Dimensions: Ø 52 x 48 mm

Settings: via DALI-Bus and application which supports DALI multisensors according to IEC62386, parts 101, 103, 303 and 304



### **Cover ring PD11 (52 mm)**

Art.No: 92537

Dimensions: Ø 52 x 3 mm

Housing: polycarbonate, UV-resistant

Material color: black glossy, similar to RAL9011