

**B.E.G.****LUXOMAT®**

## PD11-S-FLAT-FC Set 92593-92994

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions:  $\varnothing$  52 x 60 mm + 54 x 54 x 2.6 mm (92994)
- Power consumption: approx. 0.2 W

### Order data

Designation	Colour	Art.No
PD11-S-FLAT-FC	white	92593
Square design frame PD11-FC	white	92994

## Technical data

Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	<b>Ø 52 x 60 mm + 54 x 54 x 2.6 mm (92994)</b>
Power consumption:	approx. 0.2 W
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 9 m across max. Ø 6 m towards max. Ø 3 m seated
Range:	63 m <sup>2</sup> / 2.5 m mounting height
Monitored area (tangential movement):	2 m / 5 m / 2.5 m
Mounting height min./max./recommended:	IP20 / Class II
Degree / class of protection:	IK02
Impact strength:	-25 °C to +50 °C
Ambient temperature:	polycarbonate, UV-resistant
Housing:	<b>white mat, similar to RAL9010 (92994)</b>
Material color:	9 sec
Pulse interval:	

## Product information

Set : PD11-S-FLAT-FC + Square design frame PD11-FC white mat, similar to RAL9010

Super flat slave device for connection to a master device

For extending the detection area of a Master device


Trigger pulse to master device upon detected movement independent of the ambient light level

Compatible with 230 V devices. Concerning exceptions please see the respective master device.

Spring clips for quick and easy installation in suspended ceilings

Includes blinds and clamp ring for installation into light fittings

With accessories for flush-mounting in ceiling and exposed concrete

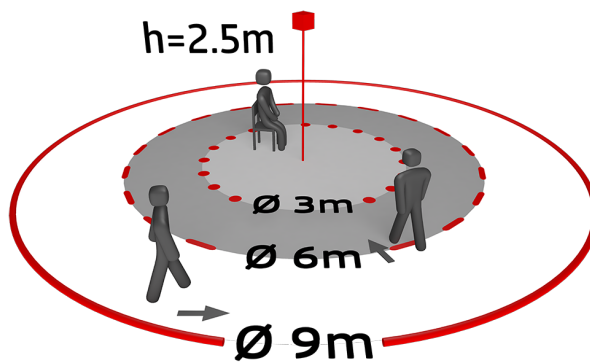

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **PD11-S-FLAT-FC**

Art.No: 92593

Voltage: 110 – 240 V AC 50 / 60 Hz

Dimensions: Ø 52 x 60 mm

Power consumption: approx. 0.2 W



### **Square design frame PD11-FC**

Art.No: 92994

Dimensions: 54 x 54 x 2.6 mm

Housing: polycarbonate, UV-resistant

Material color: white mat, similar to RAL9010