

B.E.G.

LUXOMAT®



PD4-S-C-SM Set 92442-92441

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: **Ø 101 x 76 mm + 130 x 100 x 53 mm (92441)**
- Power consumption: approx. 0.2 W

Order data

| Designation | Colour | Art.No |
|--------------------|--------|--------|
| PD4-S-C-SM | white | 92442 |
| Wall holder PD4-SM | white | 92441 |

Technical data

| | |
|---|--|
| Voltage: | 110 - 240 V AC 50 / 60 Hz |
| Dimensions: | Ø 101 x 76 mm + 130 x 100 x 53 mm (92441) |
| Power consumption: | approx. 0.2 W horizontal 360° |
| Detection area: | (Ceiling mounting) max. Ø 40 m across |
| Range: | max. Ø 20 m towards |
| Monitored area (tangential movement): | 250 m ² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2.4 m / 2.6 m / 2.5 m |
| Degree / class of protection: | IP54 / Class II |
| Impact strength: | IK04 |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white mat, similar to RAL9010 |
| Pulse interval: | 2 or 9 sec |

Product information

Set : PD4-S-C-SM + Wall holder PD4-SM white


Slave device detector designed for corridors

For extending the detection area of a Master device

Trigger pulse to master device upon detected movement
independent of the ambient light level

Compatible with 230 V devices. Concerning exceptions please
see the respective master device.

There are markings to ensure correct alignment during
installation

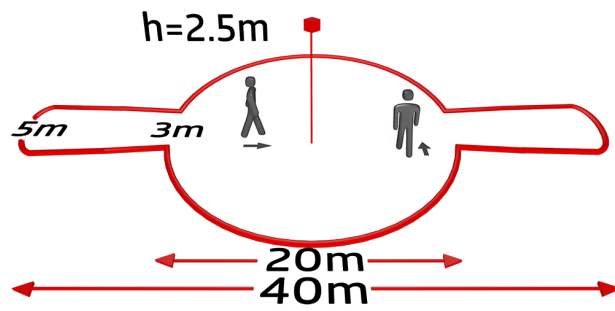

Set items

To receive the bundle according to the technical specification, please order the items listed.



PD4-S-C-SM
Art.No: 92442

Voltage: 110 – 240 V AC 50 / 60 Hz
Dimensions: Ø 101 x 76 mm
Power consumption: approx. 0.2 W



Wall holder PD4-SM
Art.No: 92441

Dimensions: 130 x 100 x 53 mm
Housing: polycarbonate, UV-resistant
Material color: white