

**B.E.G.****LUXOMAT®**

## RC-plus next N 280 Set 93343-92467

- Voltage: 110 – 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)
- Dimensions: **Ø 164 x 143 mm (92467)**
- Power consumption: approx. 0.5 W

### Areas of application

- outdoor areas (entrances/access roads)
- parking areas
- underground car parks
- high-bay warehouse

### Order data

Designation	Colour	Art.No
RC-plus next N 280	black	93343
Wire basket BSK (Ø 164 x 143 mm)	white	92467

## Technical data


Voltage:	110 - 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)
Dimensions:	<b>Ø 164 x 143 mm (92467)</b>
Power consumption:	approx. 0.5 W
Detection area:	horizontal 280° (Wall mounting) max. 20 m across
Range:	max. 6 m towards max. 4 m anti-creep protection
Monitored area (tangential movement):	970 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	<b>IK09 (92467)</b>
Ambient temperature:	-25 °C to +50 °C
Housing:	<b>polycarbonate, UV-resistant + coated steel basket (92467)</b>
Material color:	black mat, similar to RAL9005

### Channel 1 (lighting control)

Switching power:	3000 W, $\cos \varphi = 1$ 1500 VA, $\cos \varphi = 0.5$ 800 W LED max. inrush current $I_p$ (20 ms) = 165 A max. inrush current $I_p$ (200 $\mu$ s) = 800 A
Type of contact (k):	1x $\mu$ -contact, NO contact with tungsten pre-make contact
Follow-up time:	15 sec - 16 min, Pulse
Switch-on threshold:	2 - 500 Lux

## Product information

Set : RC-plus next N 280 + Wire basket BSK (Ø 164 x 143 mm) white
Motion detector with 280° detection area and anti-creep zone
Mechanical range adjustment
Different follow-up time depending on direction of movement
Uninterrupted parallel circuit detection of several detectors
Manual switching via push-button possible
Adjustable ball head
Immediate operation using factory settings
Additional functions can be set up using the optional remote control.
Zero crossing switching
Socket compatible to RC-plus (next) and Vario
Special socket for external corner mounting included
Faulty switching due to animals can be avoided by reducing the sensitivity
Easy mounting thanks to plug base
Wall, ceiling and corner mounting
Factory settings 3 min and 20 lux

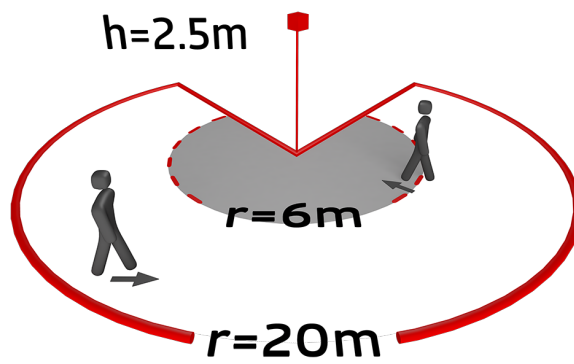

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **RC-plus next N 280**

Art.No: 93343

Voltage: 110 – 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)

Dimensions: 121 x 71 x 85 mm

Power consumption: approx. 0.5 W



### **Wire basket BSK (Ø 164 x 143 mm)**

Art.No: 92467

Dimensions: Ø 164 x 143 mm

Impact strength: IK09

Housing: coated steel basket