

**B.E.G.****LUXOMAT®**

## PD4-S-C-FC Set

### 92444-92199-92992

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: **Ø 200 x 90 mm (92199)**
- Power consumption: approx. 0.2 W

#### Order data

Designation	Colour	Art.No
PD4-S-C-FC	white	92444
Wire basket BSK (Ø 200 x 90 mm)	white	92199
Square design frame PD4-FC	pure white	92992

## Technical data

Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	<b>Ø 200 x 90 mm (92199)</b>
Power consumption:	approx. 0.2 W horizontal 360°
Detection area:	(Ceiling mounting) max. Ø 40 m across max. Ø 20 m towards
Range:	
Monitored area (tangential movement):	250 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2.4 m / 2.6 m / 2.5 m
Degree / class of protection:	IP20 / Class II
Impact strength:	<b>IK09 (92199)</b>
Ambient temperature:	-25 °C to +50 °C <b>polycarbonate, UV-resistant + coated steel basket (92199)</b>
Housing:	
Material color:	white mat, similar to RAL9010
Pulse interval:	2 or 9 sec

## Product information

Set : PD4-S-C-FC + Wire basket BSK (Ø 200 x 90 mm)  
white + Square design frame PD4-FC pure white mat,  
similar to RAL9010


Slave device detector designed for corridors

For extending the detection area of a Master device

Trigger pulse to master device upon detected movement  
independent of the ambient light level

Compatible with 230 V devices. Concerning exceptions please  
see the respective master device.

There are markings to ensure correct alignment during  
installation

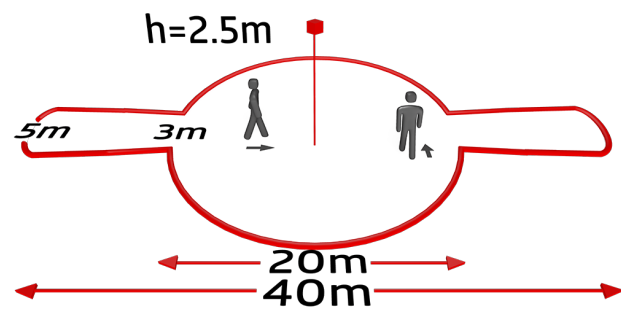

## Set items

To receive the bundle according to the technical specification, please order the items listed.



**PD4-S-C-FC**  
Art.No: 92444

Voltage: 110 – 240 V AC 50 / 60 Hz  
Dimensions: Ø 97 x 103 mm  
Power consumption: approx. 0.2 W



**Wire basket BSK (Ø 200 x 90 mm)**  
Art.No: 92199

Dimensions: Ø 200 x 90 mm  
Impact strength: IK09  
Housing: coated steel basket



**Square design frame PD4-FC**  
Art.No: 92992

Dimensions: 101 x 101 x 11.8 mm  
Housing: polycarbonate, UV-resistant  
Material color: pure white mat, similar to RAL9010