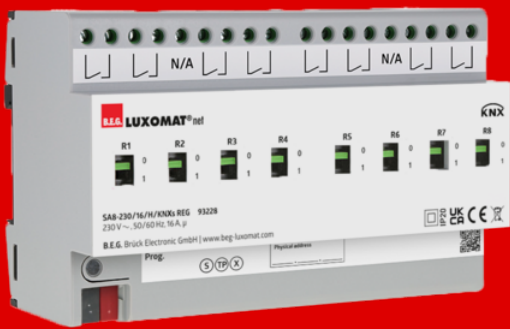


**B.E.G.****LUXOMAT<sup>®</sup>net**

## SA8 - 230 / 16 / H / KNXs REG

Prod.No. 93228 EAN: 4007529932283

- Voltage: via KNX BUS
- Dimensions: 90 x 144 x 64 mm (8 TE)
- Typ. power input: 5 mA typical  
20 mA max.

### Order data

Designation	Colour	Art.No
SA8 - 230 / 16 / H / KNXs REG	-	93228

## Technical data

Voltage:	via KNX BUS
Dimensions:	90 x 144 x 64 mm (8 TE)
Typ. power input:	5 mA typical 20 mA max.
Power consumption:	0.15 W
Degree / class of protection:	IP20 / Class II
Ambient temperature:	-5 °C to +45 °C
Material color:	-
KNX TP 256:	Yes
	KNX bus terminal black/red
Connections and wires:	0.2 ... 4.0 mm <sup>2</sup> rigid 0.25 ... 2.5 mm <sup>2</sup> fine-wired (with or without ferrule)

### per channel

Switching power:	3680 W, $\cos \varphi = 1$ max. inrush current $I_p (150 \mu s) = 600 A$
Type of contact (k):	$\mu$ -contacts, dry NO contact
Outputs:	8 switching outputs

## Product information

Switching actuator for switching loads

KNX Secure ready

Industrial quality

KNX rail-mounting device for mounting on a DIN rail (TH 35 according to EN 60715) for installation in the distribution board

The device has 8 independant potential-free NO contacts

The switching contacts are optimised for capacitive loads

Manual switches for switching without bus tension

Powered via KNX bus

Connection of the outputs via screw terminals

